

The **Coris Lowering Systems:**



**PIPESLING FP1-48" L.6500**

Pipeline flat endless slings class 7 with lateral edge protector.

Polyester webbing HT-100% anti UV

Width mm. 600 color orange. Length mm. 6500 / Circular mm. 13000

Working Load Limit vertical use (S.F. 7) :

20 Ton. EN 1492-1 / 44100 Lb. ASME B30.9 chapter 9-5


Working Load Limit basket use (S.F. 7) :

40 Ton. EN 1492-1 / 88200 Lb. ASME B30.9 chapter 9-5

Typical product built for exclusive use for the installation of gas/oil/water pipelines in combination with openable triangle fitting TP1-20

**TRIANGLE FITTING TP1-20 Ton.**

Opening triangle hook for pipe laying bands 48-56 inch.

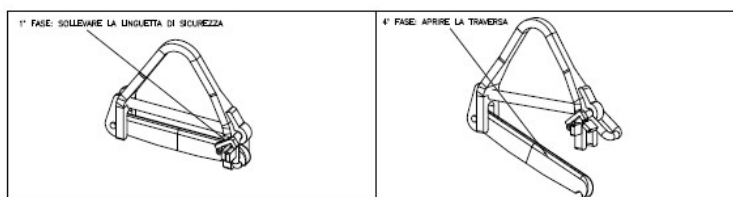

Working Load Limit (S.F. 4) :

20 Ton. EN 13155

## CORIS LOWERING SYSTEMS



**CoRis**  
www.coris-pipeline.com

44100 Lb. ASME B30.9

For use only endless slings width mm. 600

Typical product built for exclusive use for the installation of gas/oil/water pipelines.

### RSL-25 L. 7000

PIPELINE SLINGS POLYESTER HT-100% ANTI-UV

WORKING LOAD LIMIT VERTICAL 25 Ton. / WORKING LOAD LIMIT BASKET 50 Ton. ( Reference standard for use and maintenance EN1492-1 Safety factor 7)

WIDTH mm. 300. x. LENGTH mm. 7.000. (CIRCULAR mm.14.000)

Typical product built for exclusive use for the installation of natural gas pipelines.

Product markings: with two independent label. (ASME B30-2006 standard and W.L.L. expressed in "lb"+EN standard W.L.L. expressed in Ton.)



**CoRis srl**  
sede legale: Via Resga Enza 1, 43022 Montechiarugolo (PR) ITALY  
sede operativa: fraz. Formio, 94/a, 43036 Fidenza (PR) ITALY  
Telefono +39 0524 423576  
e-mail info@coris-pipeline.com  
www.coris-pipeline.com